

SC(B)300

Strong and sturdy with attractive lines and an imposing frame, the SC(B)300 is fitted with a time-delay OFF feature up to nine minutes, a 300 CFM fan, bright LED lights and a digital three-speed push button control panel.



Green Features



3 Speed Push Button Control



Long- lasting LED lights



Grease Cup



Time- Delay OFF Feature




Features

- Wall mount range hood
- 6" round duct adapter
- Non- stick Aluminium fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release Aluminium Mesh/ Stainless Steel Baffle filters
- Standard chimney flue fits upto 9 ft. ceiling
- Plug in connection


Specifications

- Air Flow Volume: 300 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts
- Current: 2.5 Amps
- Fan Speed: 1350 RPM
- Fan Type: Centrifugal Blower
- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones Max. 4 Sones

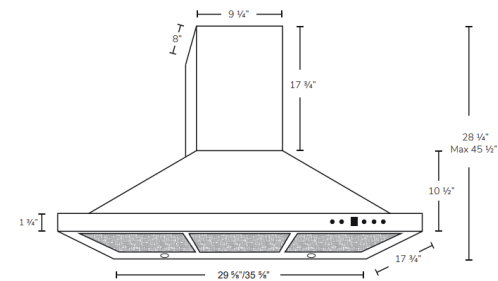

Options

- Filters: Aluminium Mesh Filters, Baffle Filters
- Chimney Flues: A1.CH10 - short (7'-8' ceilings)
A1.CH18 - standard (8'-9' ceilings)
A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

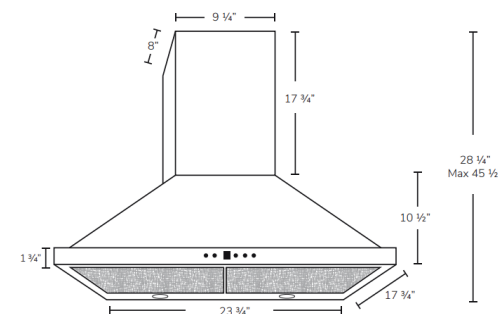

Model	Colour	Ducting	Filters	Size	CFM
SC30024	Stainless Steel	6"	Mesh	24"	300
SC30030	Stainless Steel	6"	Mesh	30"	300
SC30036	Stainless Steel	6"	Mesh	36"	300
SCB30024	Stainless Steel	6"	Baffle	24"	300
SCB30030	Stainless Steel	6"	Baffle	30"	300
SCB30036	Stainless Steel	6"	Baffle	36"	300

Cyclone Range Hoods

www.CycloneRangeHoods.com

Toll free- 888.293.5662