

ESLWP3S100 | BATH Ventilation

Cyclone[®]
Breathe Better

Ventilation Fan

Upgrade your ventilation without compromising space or style. The Cyclone ESLWP3S100 is a sleek, ultra-slim bath fan designed for modern performance and efficiency. Featuring three selectable speeds (50 / 80 / 100 CFM) and operating as quietly as 0.3 sones, this Energy Star[®] certified fan ensures powerful ventilation with whisper-quiet operation.

Engineered with a low-profile 3 3/8" housing, the ESLWP3S100 is ideal for tight ceiling spaces or retrofit applications. Certified by HVI and ETL listed for safety and performance, it's the perfect solution for residential or light commercial use.



Features

- 3 speed options in one fan: 50 CFM / 80 CFM / 100 CFM
- Max. 1.1 sones
- Thermal fuse protection
- ENERGY STAR certified
- Includes 4" duct connector
- Recommended for bathrooms up to 95 sqft (8' ceiling)
- Low speed runs continuously (Adjustable 0, 30 CFM to Max. CFM)

Housing

- Wiring from inside or outside housing with 8" leads
- 26 gauge galvanized steel housing (corrosion resistant)

Motor

- Includes a built in overload disconnect for safety and longer motor life
- Includes a capacitor start motor that performs with high efficiency and long lasting reliability
- Plug-in permanently lubricated DC motor, engineered for continuous operation

Installation

- Fit any joist from Min: 12" to Max: 24" width spans
- Can be mounted with flange or hanger bars
- 4" diameter duct connectors supplied
- Heavy duty triple point mounting brackets that can be adjusted up to 24 inch joist centers without vibration
- Premium grille is made of rugged polymeric resin for durability & comes with torsion spring clips for even mounting



Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.


Toll Free: 1-888-293-5662

Tel: (416) 293-0933

Fax: (416) 293-4793

Website: www.CycloneRangeHoods.com

ESLWP3S100 | BATH Ventilation

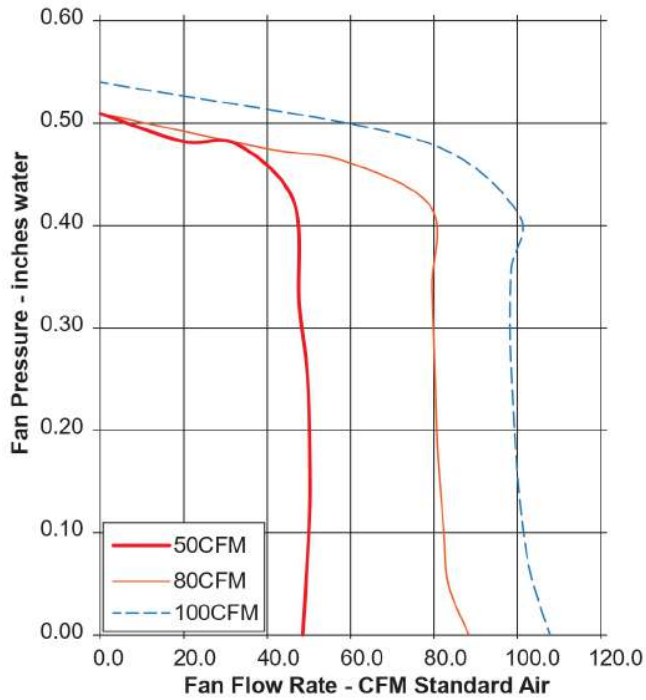

SPECIFICATIONS	ESLWP3S100		
Static Pressure	0.1	0.1	0.1
Noise Level (Sones)	0.3	0.7	1.1
Air Flow Volume (CFM)	50	80	100
Current (Amps)	0.1		
Power Consumption (Watts)	12		
Electrical Connection (V/Hz)	120/60		
Thermal Fuse Protection	Yes		
Motor Type	DC		
Blower Wheel	Centrifugal		
Duct Diameter	4"		

