

# PTB56 | PRO Collection



30" Stainless Steel



30" Matte Black

## Undermount

The PTB56 incorporates the best features of our PRO series with our CLASSIC series of undermount fans. A stunning top gauge stainless steel or matte black frame encases the heavy-duty 680 CFM fan and bright, dual setting LED lights. Featuring machine-washable, industrial strength baffle filters perfect for high-heat cooking. Equipped with a 3 minutes time-delay OFF feature. For a refined and professional appeal in an undermount you can do no better than the PTB56.

## Green Features



4 Speed  
Push Button  
Control Panel



Dishwasher Safe  
Baffle Filters



Grease Tray



Long-Lasting  
LED Lights



Time-Delay  
OFF Feature



Grease  
Ring



| Model     | Colour          | Duct | Filters | Size | CFM |
|-----------|-----------------|------|---------|------|-----|
| PTB5630SS | Stainless Steel | 6"   | Baffle  | 30"  | 680 |
| PTB5636SS | Stainless Steel | 6"   | Baffle  | 36"  | 680 |
| PTB5630MB | Matte Black     | 6"   | Baffle  | 30"  | 680 |
| PTB5636MB | Matte Black     | 6"   | Baffle  | 36"  | 680 |



Cyclone Range Hoods Inc.

1355 Huntingwood Drive, Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: [www.CycloneRangeHoods.com](http://www.CycloneRangeHoods.com)

## Features

- Undermount range hood
- 3 ¼" x 10" rectangular damper
- Non-stick aluminum fan blades
- 4 speed push button control panel
- 2 LED lights for 30", 3 LED lights for 36" (1.4W, 4000K)
- Quick release dishwasher-safe baffle filters
- 3 minutes time-delay OFF feature
- Hard-wire connection

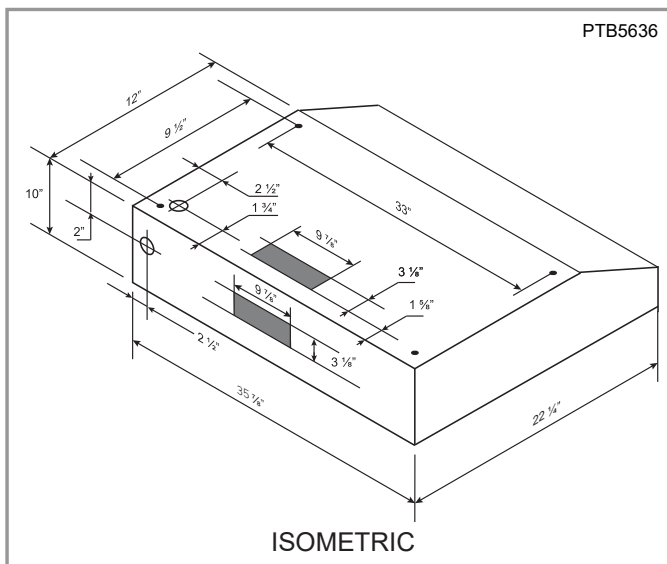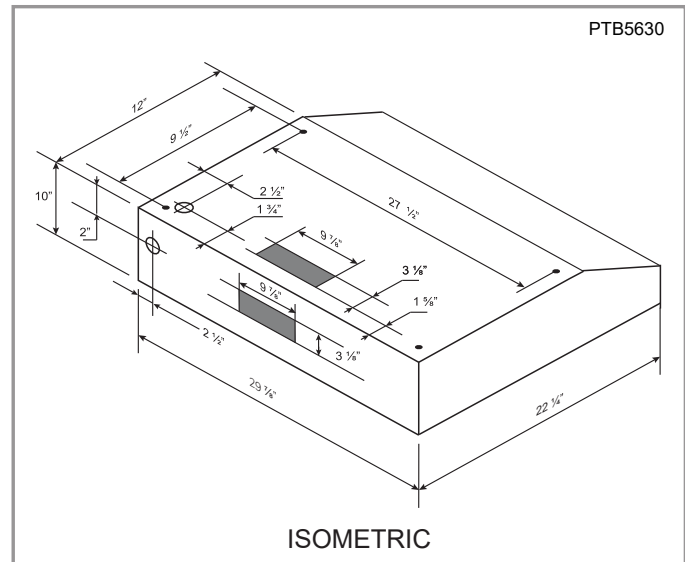

## Options

- Widths: 30", 36"
- Finishes: Stainless Steel, Matte Black

Note: 36" comes with three filters

## Specifications

- |                                                                                                                                                                                                 |                                                                                                                                                                                               |                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>▪ Air Flow Volume: 680 CFM</li> <li>▪ Electrical Connection: 120 V/60 Hz</li> <li>▪ Power Consumption: 288 Watts</li> <li>▪ Current: 2.4 Amps</li> </ul> | <ul style="list-style-type: none"> <li>▪ Fan Speed: 1600 RPM</li> <li>▪ Fan Type: Dual Axial Blower</li> <li>▪ Finishes: Stainless Steel, Matte Black</li> <li>▪ Ducting: 6" Round</li> </ul> | <ul style="list-style-type: none"> <li>▪ Noise Level: Min. 2 Sones<br/>Max. 7 Sones</li> <li>▪ Knock-out: 3 ¼" x 10"<br/>Rectangular<br/>(Top or Rear)</li> </ul> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|